



ONYX OXVWS55




The ONYX 55" Video Wall is a professional-grade display solution designed for 24/7 operation in control rooms, surveillance centers, corporate environments, retail spaces, and digital signage applications. Featuring an ultra-narrow 0.88 mm bezel, Full HD (1920 × 1080) resolution, 500 nits brightness, and a wide 178° viewing angle, it delivers a seamless and immersive visual experience. With support for 1.06 billion colors, and high image quality, the ONYX video wall provides reliable, continuous performance for demanding commercial applications.

Basic model		OXVWS55
Panel	Display size	55" inch
	Color display	1.06B, 72% NTSC
	Screen display size	1209.6 × 680.4 mm (H×V)
	Physical resolution	1920×1080
	Backlight type	WLED, 50K hours
	Bezel thickness	0.88 mm
	Brightness	500 nits
	Contrast	1100: 1
	Surface Coating	Antiglare (Haze 28%), Hard coating (2H)
	Viewing angle	178 °/178 °
	Visible size	1214.6 × 685.4 mm (H×V)
	Operation hour	24/7 ; 50 000 hours
	Response time	< 8 ms
Main parameters	Input	DP input interface x 1; USB interface x 1; Lan(RJ45) x 1; VGA x 1;
	Output	DP output interface x 1; DVI,HDMI X 1; Lan(Looping out) x 1; Audio x 1; External control - RS232, RJ45
	Refresh rate	60Hz
	Net weight	25 KG
Environment	Workplace	Indoor
	Operating temprature	0 ~ 50 °C
	Storage temperature	-20 ~ 65 °C
	Input the voltage	AC100-240V~(+/-10%), 50/60Hz



	Rated power consumption(W)	≤205W
Warranty	Warranty Period	1 Year
	Technical Support	Lifetime

Machine dimensions Unit: mm

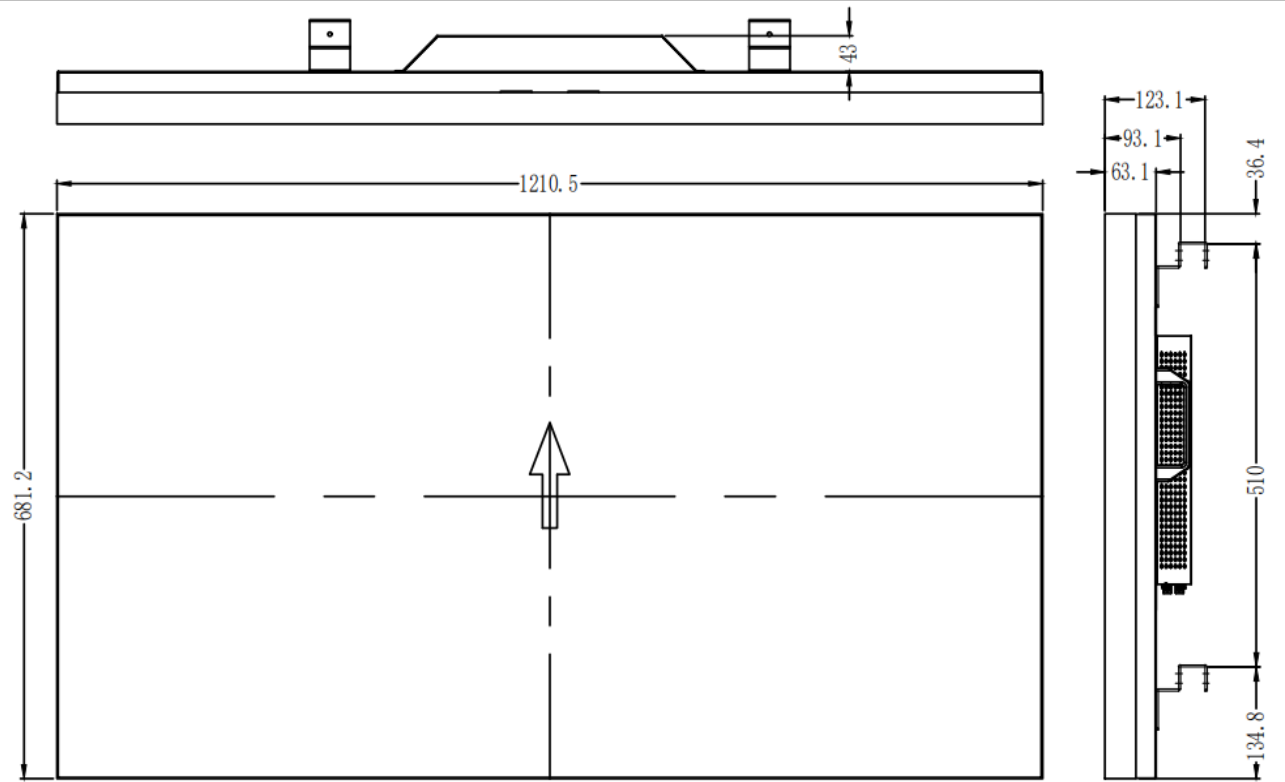

onyxdisplay.com