




Digital Signage

The 43" Portable Digital Signage Display offers Full HD resolution (1920 × 1080) with 350 nits brightness for clear, vibrant visuals. Featuring a slim, durable design with sheet metal and tempered glass, it's built for 24/7 operation with up to 60,000 hours of lifespan. It offers flexible installation with options for floor or mobile stands, and supports HDMI, USB, TF card, and RJ45 connections. Ideal for retail, restaurants, and public spaces, this portable display combines high performance and easy setup for dynamic content delivery.

Basic model		OXDSFH43PA11.0
Panel	Display size	43" inch
	Screen type	LCD module, a-Si TFT-LCD
	Screen display size	1073.78 × 604 mm
	Physical resolution	1920x1080
	Number of colors	16.7M/1.07B, 68% [CIE1931]
	Refresh rate	60HZ
	Brightness	350nits
	Contrast	1200: 1 (Typ.) [transmission]
	Signal system	V-by-One 8 lane, terminal, 51 pins
	Optical mode	IPS, constant black display, transmission mode
	Best angle	all angle of view
	Viewing angle	89/89/89/89 (Min.) (CR > 10)
	Surface treatment	foggy surface (Haze 1%), Hard coating (3H)
	Pixel configuration	RGBW vertical strip
	Backlight type	WLED, 50K hours, no driver
Mayn parameters	Speaker specifications	8Ω5W Stereo speakers *2 pcs
	Operating system	Android 11
	CPU	RK3568, quad-core, main frequency up to 2.0GHz , Android 11
	GPU	Mali-G52 GPU supports OpenGL ES 1.1/2.0/3.2, OpenCL 2.0, Vulkan 1.1
	Memory	2GB
	FLASH	16 GB , TF Card expansion (can be used to expand SSD)
	Network	Support RJ45 R/A 100M Ethernet, support Ethernet ; Support 5.8 GHz Wi-Fi ; Support Bluetooth 4.2 , mobile phone can send programs via Bluetooth.
	Bluetooth	Yes
	USB	1 USB-3.0 HOST, 1 USB3.0 OTG, 5 expansion USB ports
	Dysplay interface	1*LVDS interface (single/dual channel, 6-bit/8-bit), supports 3.3V/5V/12V power supply 1 EDP interface, 1 HDMI 1 V- By-One interface, supports 1 080 P output Reserve 1 HDMI IN interface, can be equipped with a small board Onboard backlight control supports 12V backlight power supply
	Color	Black



	Power adapter	Input: AC100-240V.50-60HZ, Output: DC12V 1.5A (The surge voltage is required to be less than 18V and the ripple voltage is less than 100mV)
	Input the voltage	AC100-240V~(+/-10%), 50/60Hz
	Rated power consumption	220W
	Installation	floor stand
Environment	Workplace	Indoor
	Operating temprature	0 ~ 50 degree C
	Storage temperature	-20 ~ 60 degree C
	Storage humidity	10% - 90% non-condensation
Warranty	Warranty Period	2 Year
	Technical Support	Lifetime
Machine dimensions Unit: mm		

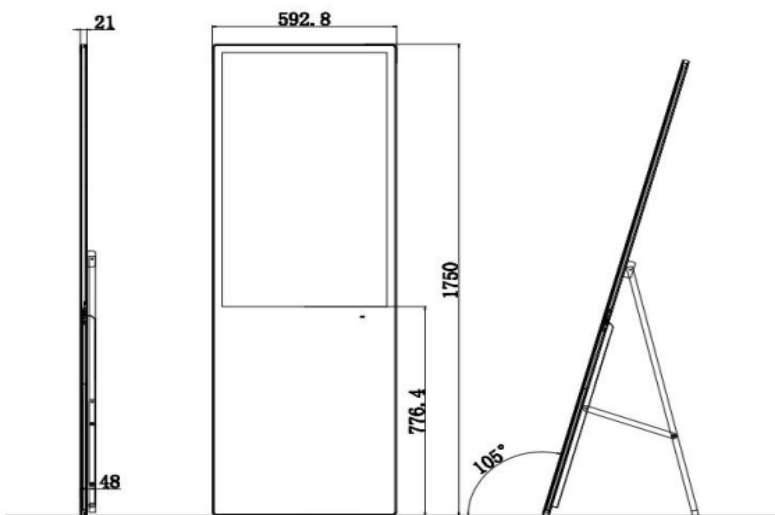

Additional configurations available

Built-in storage capacity	eMMC standard 16GB optional 32GB TF Card expansion (can be used to expand SSD)
Memory	Standard 2G DDR4, Upgraded to 4G DDR4
Expansion interface	1x MINI-SATA SSD interface
Version	USB/Android/ Windows(optional)
Installation	Standard floor stand or stand with wheels (Option)
Touch screen option	Infrared Touch

ONYX